



ARUDA

Tracked
Spotlight
Series



Standard
&
Integrated Driver



Beam Focusing
Option
(10°~60°)



Mounting
&
Colour Options



Accessory
Range

ARUDA

Standard Track Spotlight Series

Aruda
(Standard)



PHASE	1-10V	DALI	Driver Included	
CRI 80 90 90+	IP54 (Optional)	UGR <19	Operating Hours > 100,000	L70 > 50,000 Hours
2-3step McAdam <small>(optional)</small>	OPERATION TEMP -20°C to 50°C!	5 Years warranty	RoHS	CE

SPECIFICATIONS

Product Code	LED Output (lm)	LED Power (W)	Efficiency (lm/W)	Input Voltage (Vac)	Track Type
LY-TR-AR-7W-①-②-③-④-⑤	700	7	100	200-240	2/3/4 Wire
LY-TR-AR-10W-①-②-③-④-⑤	1000	10	100	200-240	2/3/4 Wire
LY-TR-AR-15W-①-②-③-④-⑤	1500	15	100	200-240	2/3/4 Wire
LY-TR-AR-30W-①-②-③-④-⑤	3000	30	100	200-240	2/3/4 Wire
LY-TR-AR-40W-①-②-③-④-⑤	4000	40	100	200-240	2/3/4 Wire

CUSTOMIZABLE SPECIFICATIONS

① Beam Angle	② Colour Temperature	③ Housing Colour	④ IP Rating	⑤ Dimming
12D 25D 38D	27 (2700K) 30 (3000K) 40 (4000K) 60 (6000K)	WH (White) BK (Black)	IP20 IP54	ND (Non-Dim) DA (Dali) D0 (0-10V) PH (Phase)

(Example Code Format: LY-TR-AR-7W-25D-30-BK-IP20-ND)

LENS ACCESSORY

	Product Code LY-TR-AR- *W-HC
	Product Code LY-TR-AR- *W-FR
	Product Code LY-TR-AR- *W-ED
	Product Code LY-TR-AR- *W-WD
	Product Code LY-TR-AR- *W-AD
	Product Code LY-TR-AR- *W-CF

*7/10/15/30/40
(Wattage)

DIMENSIONS (MM) & LIGHT DISTRIBUTION

<p>LY-TSAR-7W</p>	<p>LY-TSAR-10W</p>	<p>LY-TSAR-15W</p>
<p>LY-TSAR-30W</p>	<p>LY-TSAR-40W</p>	

ARUDA

Standard Track Spotlight Series

Aruda
(Integrated Driver)



PHASE	1-10V	DALI	Driver Included	
CRI 80 90 90+	IP54 (Optional)	UGR <19	Operating Hours > 100,000	L70 > 50,000 Hours
2-3step McAdam <small>(optional)</small>	OPERATION TEMP -20°C to 50°C!	5 Years warranty	RoHS	CE

SPECIFICATIONS

Product Code	LED Output (lm)	LED Power (W)	Efficiency (lm/W)	Input Voltage (Vac)	Track Type
LY-TR-ARI-7W-①-②-③-④-⑤	700	7	100	200-240	2/3/4 Wire
LY-TR-ARI-10W-①-②-③-④-⑤	1000	10	100	200-240	2/3/4 Wire
LY-TR-ARI-15W-①-②-③-④-⑤	1500	15	100	200-240	2/3/4 Wire
LY-TR-ARI-30W-①-②-③-④-⑤	3000	30	100	200-240	2/3/4 Wire
LY-TR-ARI-40W-①-②-③-④-⑤	4000	40	100	200-240	2/3/4 Wire

CUSTOMIZABLE SPECIFICATIONS

① Beam Angle	② Colour Temperature	③ Housing Colour	④ IP Rating	⑤ Dimming
12D 25D 38D	27 (2700K) 30 (3000K) 40 (4000K) 60 (6000K)	WH (White) BK (Black)	IP20 IP54	ND (Non-Dim) DA (Dali) D0 (0-10V) PH (Phase)

(Example Code Format: LY-TR-ARI-7W-25D-30-BK-IP20-ND)

LENS ACCESSORY

	Product Code LY-TR-ARI-*W-HC
	Product Code LY-TR-ARI-*W-FR
	Product Code LY-TR-ARI-*W-ED
	Product Code LY-TR-ARI-*W-WD
	Product Code LY-TR-ARI-*W-AD
	Product Code LY-TR-ARI-*W-CF

DIMENSIONS (MM) & LIGHT DISTRIBUTION

<p>LY-TSARI-7W</p>	<p>LY-TSARI-10W</p>	<p>LY-TSARI-15W</p>
<p>LY-TSARI-30W</p>	<p>LY-TSARI-40W</p>	

*7/10/15/30/40
(Wattage)

ARUDA Z

Beam Focusing Track Spotlight Series

Aruda Z
(Standard)



PHASE	1-10V	DALI	Driver Included
CRI 80 90 90+	IP54 (Optional)	UGR <19	Operating Hours > 100,000
2-3step McAdam <small>(optional)</small>	OPERATION TEMP -20°C to 50°C!	5 Years warranty	L70 > 50,000 Hours
		RoHS	CE

SPECIFICATIONS


Product Code	LED Output (lm)	LED Power (W)	Efficiency (lm/W)	Input Voltage (Vac)	Track Type	Beam Angle (°)
LY-TR-ARZ-30W-①-②-③-④	3000	30	100	200-277	2/3/4 Wire	10-60

CUSTOMIZABLE SPECIFICATIONS

① Colour Temperature	② Housing Colour	③ IP Rating	④ Dimming
27 (2700K) 30 (3000K) 40 (4000K) 60 (6000K)	WH (White) BK (Black)	IP20 IP54	ND (Non-Dim) DA (Dali) D0 (0-10V) PH (Phase)

(Example Code Format: LY-TR-ARZ-30W-30-BK-IP20-ND)

DIMENSIONS (MM) & LIGHT DISTRIBUTION

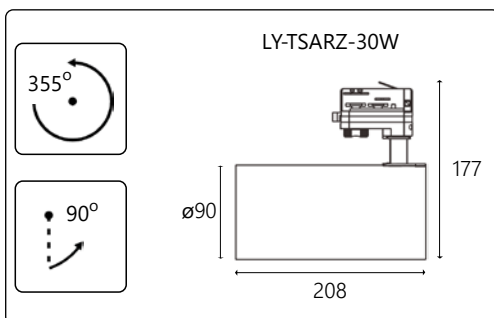

LENS ACCESSORY

Honeycomb Filter	Product Code LY-TR-ARZ-30W-HC	Wedge Dowser	Product Code LY-TR-ARZ-30W-WD
Frosted Filter	Product Code LY-TR-ARZ-30W-FR	Adjustable Dowser	Product Code LY-TR-ARZ-30W-AD
Extended Dowser	Product Code LY-TR-ARZ-30W-ED	Coloured Filter	Product Code LY-TR-ARZ-30W-CF

ARUDA Z

Beam Focusing Track Spotlight Series

Aruda Z
(Integrated Driver)



PHASE	1-10V	DALI	Driver Included	
CRI 80 90 90+	IP54 (Optional)	UGR <19	Operating Hours > 100,000	L70 > 50,000 Hours
2-3step McAdam <small>(optional)</small>	OPERATION TEMP -20°C to 50°C!	5 Years warranty	RoHS	CE

SPECIFICATIONS


Product Code	LED Output (lm)	LED Power (W)	Efficiency (lm/W)	Input Voltage (Vac)	Track Type	Beam Angle (°)
LY-TR-ARZI-30W-①-②-③-④	3000	30	100	200-277	2/3/4 Wire	10-60

CUSTOMIZABLE SPECIFICATIONS

① Colour Temperature	② Housing Colour	③ IP Rating	④ Dimming
27 (2700K) 30 (3000K) 40 (4000K) 60 (6000K)	WH (White) BK (Black)	IP20 IP54	ND (Non-Dim) DA (Dali) D0 (0-10V) PH (Phase)

(Example Code Format: LY-TR-ARZI-30W-30-BK-IP20-ND)

DIMENSIONS (MM) & LIGHT DISTRIBUTION

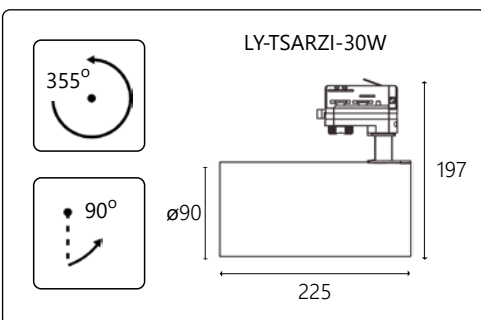

LENS ACCESSORY

Honeycomb Filter	Product Code LY-TR-ARZI-30W-HC	Wedge Dowser	Product Code LY-TR-ARZI-30W-WD
Frosted Filter	Product Code LY-TR-ARZI-30W-FR	Adjustable Dowser	Product Code LY-TR-ARZI-30W-AD
Extended Dowser	Product Code LY-TR-ARZI-30W-ED	Coloured Filter	Product Code LY-TR-ARZI-30W-CF